




SPECIFICATIONS  
**BFQ80**  
 EXHAUST FANS

**HVI 2100 CERTIFIED** 80 CFM/2.0 Sones @ 0.10" SP., 32.0 Watts  
 61 CFM @ 0.25 SP.

- **Grill**  
 White, polymeric grill secured in place with torsion springs; easily removed if necessary, dimensions - 10" x 10".
- **Blower Wheel**  
 One piece polymeric wheel 5 1/8" diameter, 2 3/8" wide, with 48 fins.
- **Motor**  
 Heavy duty, permanently split capacitor, plug-in, 4 pole motor, life time lubrication, thermally protected, suitable for continuous operation. Rated 120 volts, 60 hz.
- **Fan Housing**  
 PC/ABS polymeric, dimensions 8 1/2" x 9 1/8" x 4 3/4".
- **Duct Collar**  
 Plastic collar for 4" duct connection, comes complete with built in non-metallic back draft damper for quiet operation.
- **Ventilating Area**  
 For bathrooms up to 65 sq. ft. For other rooms up to 85 sq. ft.
- **Single Pack Shipping Info**  
 Box Dim: 11" x 12" x 6"  
 UPC: 0-8316290302-0  
 Shipping Weight: 5 1/4 lbs.

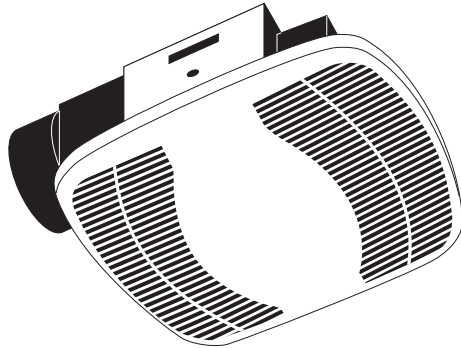

Acceptable for use over tub or shower when installed in a GFCI protected branch circuit.



- **Unit Mounting**  
 Designed to mount in ceilings with at least 6" of clearance. The unit is mounted directly to the joist using a separate lock-in bracket (included with unit). The housing will mount through drywall thickness up to 3/4", with a rough-in opening of 8 1/2" x 9 1/8".

| EXPANDED PERFORMANCE  |                                  |      |     |       |      |     |      |     |               |                |               |             |      |
|-----------------------|----------------------------------|------|-----|-------|------|-----|------|-----|---------------|----------------|---------------|-------------|------|
|                       | Static Pressure (inches of w.g.) |      |     |       |      |     |      |     | Sones @ .1 SP | Sones @ .25 SP | Fan Speed RPM | Power Watts | Amps |
|                       | 0                                | 0.05 | 0.1 | 0.125 | 0.15 | 0.2 | 0.25 | 0.3 |               |                |               |             |      |
| <b>Air Flow - CFM</b> | 87                               | 84   | 80  | 78    | 75   | 69  | 61   | 52  | 2.0           | 2.0            | 1347          | 32.0        | 0.3  |

| <b>PROJECT</b>    |              |     |         |     |       |      | <b>ARCHITECT</b>    |     |                              |  |  |             |  |
|-------------------|--------------|-----|---------|-----|-------|------|---------------------|-----|------------------------------|--|--|-------------|--|
| <b>LOCATION</b>   |              |     |         |     |       |      | <b>ENGINEER</b>     |     |                              |  |  |             |  |
| <b>CONTRACTOR</b> |              |     |         |     |       |      | <b>SUBMITTED BY</b> |     |                              |  |  | <b>DATE</b> |  |
| FAN NUMBER        | MODEL NUMBER | CFM | IN W.C. | RPM | WATTS | AMPS | SONES               | QTY | OPTIONAL EQUIPMENT & REMARKS |  |  |             |  |
|                   |              |     |         |     |       |      |                     |     |                              |  |  |             |  |



QPTUSA International Corp  
 20851 Johnson Street Unit #105  
 Pembroke Pines, FL 33029  
 Phone: 305-883-9949  
 Email: info@qptusa.com