


AIR COMPRESSOR LUBRICANTS

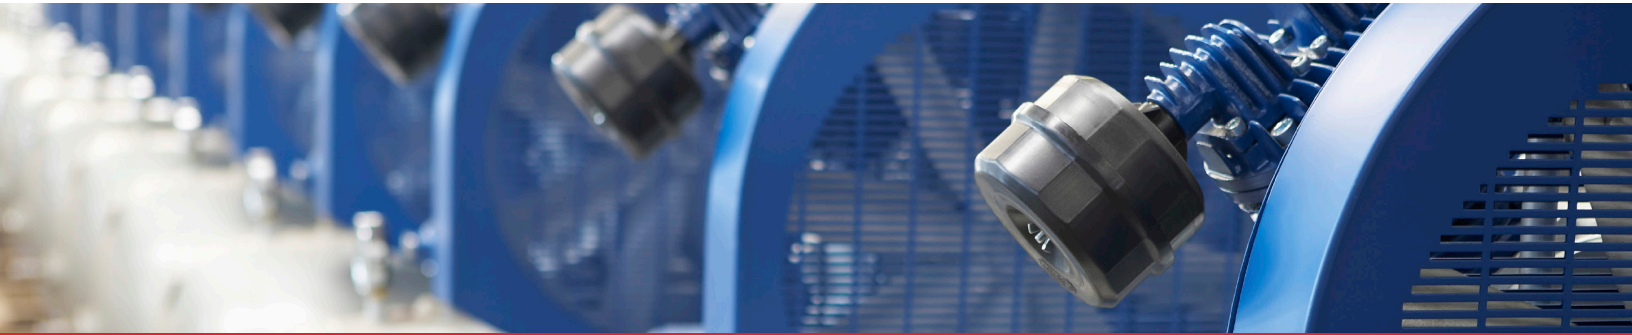

Your Ideal Solution For Performance, Protection & Fluid Life

Applications

Sumoil air compressor fluids are ideal for a broad range of applications:

- Centrifugal
- Industrial Blower
- Portable
- Reciprocating Piston
- Rotary Screw
- Rotary Vane

Full Protection

Designed for virtually any application or environment, Sumoil air compressor fluids protect against:

- | | |
|-----------------------|------------------------|
| • Oxidation | • Mechanical stress |
| • Deposit formation | • Extreme temperatures |
| • Water contamination | • Chemical inhalation |
| • Wear | |


Unmatched air compressor lubricants

Sumoil compressor fluids are formulated to withstand the most punishing temperatures and pressures encountered in modern air compressors. We take into account the environments you may encounter in the field (such as extreme heat or cold), the discharge temperatures of the systems, and numerous other factors that may affect the lubrication of an air compressor. It's how we help engineer your success.

Performance advantages

- Maximum oxidative resistance, wear protection, carbon/varnish control and more
- All products proven to excel in customers' real-world conditions, including tough environments such as:
 - » Hot and humid southeastern United States
 - » Extremely hot and arid southwestern United States
 - » Freezing cold northern Alaska, Canada and Antarctica
- Extended fluid life
- All products rated at 100% fluid life at 212°F (100°C)
- Readily separates from water to minimize rusting and viscosity dilution
- Enhanced wear protection that will not diminish fluid life or corrode components

In addition, Sumoil's air compressor fluids are designed to be completely top-off compatible with their OEM and aftermarket equivalents. Therefore, no flushing or time-consuming change-out procedures are necessary to switch to a compatible Sumoil fluid.

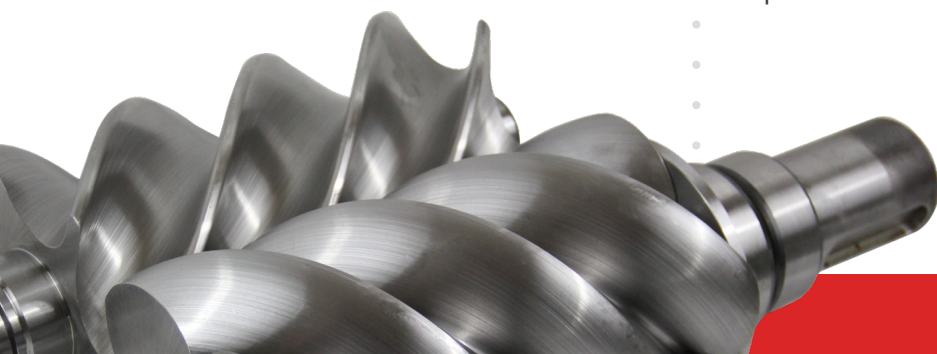

AIR COMPRESSOR LUBRICANTS

Fluids			
Product	Description	Fluid service hours at 100°C discharge temperature	Application
PGRI	Synthetic Air Compressor Lubricant	10,000 hours	Rotary screw air compressors
PGRS	Synthetic Air Compressor Lubricant	10,000 hours	Rotary screw air compressors
A467C	Synthetic Compressor Lubricant	4,000–6000 hours	Rotary screw, reciprocating and vane air compressors
A687C	Synthetic Compressor Lubricant	4,000–6000 hours	Rotary screw, reciprocating and vane air compressors
A4000C	Synthetic Compressor Lubricant	4,000–6000 hours	Rotary screw, reciprocating and vane air compressors
SFG	Advanced Food-Grade Air Compressor Lubricant	8,000 hours	Food-grade rotary screw, reciprocating, rotary vane and centrifugal air compressors



International Sales Office:

Phone: (305) 883-9949 • Email: info@sumoilcorp.com • www.sumoilcorp.com